

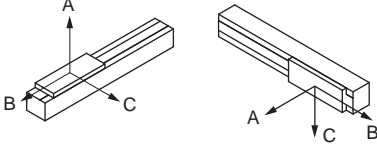
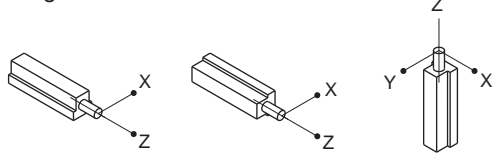
EBS/EBR Model Selection Check Sheet → CKD (Contact)

Fill in the form and send to the nearest CKD Sales Office. We will respond with the model selection results.

Customer:

Company		Department	
Name		E-mail	
TEL		FAX	

Selecting conditions:

Desired model	(EBS/EBR)-			
Basic specifications	Max. stroke length:	mm, ball screw lead:	mm	
Operating conditions	Travel stroke:	mm, travel time:	s	
	Set speed:	mm/s		
	Set acceleration/deceleration:	mm/s ² (set acceleration/deceleration time: s)		
	Repeatability: ±	mm		
Load conditions	Slider		Rod	
	Load weight: kg			
	Mounting orientation: Horizontal / wall mounted / vertical / ceiling mounted / other		Mounting orientation: Horizontal / wall mounted / vertical / ceiling mounted / other	
				
	Distance from slider and rod center to the center of gravity of load			
	Direction A: mm		Direction X: mm	
	Direction B: mm		Direction Y: mm	
Direction C: mm		Direction Z: mm		
Pressing load: No / Yes (N) Operating / Stopped Direction of the force applied to slider center ()				
Working environment	Ambient temperature: °C, ambient humidity: %			
	Atmosphere:			
Interface specifications	Parallel I/O / IO-Link / CC-Link / EtherCAT / EtherNet/IP			
Remarks				